DATASHEET

CS40

H.264 / PIR / Illumination LED / microSD Slot

CS40
Plug-n-Play / H.264
Network Camera
"It has never been so easy to view your doorway, garage, and hallway on your smartphone or tablet !

- Small and functional design
- 10X digital zoom
- H.264 and MJPEG compression
- 2-way audio communication via microphone and speaker
- MicroSD card slot for events recording and snapshots
- PIR sensor and illumination LED
- Smart motion detection
- Exclusive smartphone app
- Upgradeable to WiFi with Compro WL160 USB stick (802.11b/g/n)
- Dual video streaming

Compro CS40 is a sleek and compact network camera, plug-n-play design with built-in PIR (Passive Infrared motion detection) sensor and illumination LED let you instantly monitor your home and valuable possessions from anywhere in the world.

Easy Installation and Setup

The camera is so easy to set up that even novice users can complete the setup in 5 minutes. Unlike other network cameras, installing this camera does not require any networking expertise. Nor is any sort of router setup required - simply plug in the cable, install the camera software, and then your CS40 camera is ready to be viewed and shared on the Internet.

Exclusive Mobile App

You can download the exclusive and feature-rich camera viewer app to view and manage your Compro cameras on the iPhone® or Android™ devices. Also, the free mobile app enables you to securely share camera video with your friends and families on your Friends list.

SMS & Email Notification

The event notification feature enables the camera to send an alert message to user-specified recipients when it detects motion events. The SMS service runs on a web-based SMS gateway platform and does not impose any monthly fees. The Email service supports popular webmail platforms.

PIR sensor and Illumination LED

The camera's integrated PIR sensor (Passive Infrared Sensor) can detect intruder's movements even in pitch darkness and the movement can trigger the camera to start recording video or snapshot. The camera also can automatically illuminate the scene with its built-in white LED upon detecting events, allowing it to capture clear images of the intruder's face.

Easy Wireless Network Installation

CS40 offers a fast and easy wireless upgrade solution. Simply plug the optional wireless adapter into the camera's USB socket, and you will instantly get 802.11 b/g/n wireless LAN support on the CS40.

Intelligent Home Surveillance Solution

CS40 offers a wealth of applications to provide an intelligent surveillance solution, such as iWizard and WebVUer. iWizard is a smart installer to turn the complicated network camera installation into a simple and fast process. WebVUer is an intuitive IE-based video management software loaded with all the key features for trouble-free remote monitoring.

REVISED 22FEB13

TECHNICAL SPECIFICATIONS

CAMERA

Image Sensor	1/7" progressive scan CMOS sensor
Lens	• Focal length: 2.0 mm • Max aperture ratio: F2.8 • Fixed iris
Zoom	10x digital zoom
Angle of View	40° horizontal
Focusing Range	1 m ~ INF
Minimum Illumination	1.0 lux
Shutter Time	1/5 ~ 1/16000 sec.

VIDEO

Video Compression	M-JPEG, H.264 (MPEG-4 Part 10)
Resolution	160x120, 320x240, 640x480
Frame Rate	Up to 30 FPS at 640x480
Video Streaming	Dual streaming supported
Image Settings	• Adjustable image size and quality • AGC, AWB, AES • Configurable brightness, contrast, saturation and sharpness

AUDIO

Audio Communication	Two-way audio with built-in microphone and speaker
Audio Compression	G.711 PCM 64Kbit/sec

NETWORK

Wireless LAN	Optional 802.11n USB wireless adapter
Security	• User name / password protection • WEP/WPA/WPA2 encryption (wireless network)
Protocols	TCP/IP, HTTP, UDP, FTP, ICMP, ARP, DHCP, NTP, DDNS, UPnP, RTP, RTSP, RTCP, SMTP, IGMP, 3GPP, IPv4
Ethernet	10/100 Base-T, autosensing, RJ-45

FIRMWARE

Firmware	• Support UPnP • Support online firmware update

WEB BROWSER

Internet Explorer (ActiveX)	• Remotely view and configure camera on Internet Explorer • Record video and capture snapshots on PC • Alarm and event management: FTP and SMS/ Email alert messaging
Supported Viewing Devices	• PC, laptop, tablet, nettop, MID with IE8 • iPhone®/iPad, BlackBerry, Android™, WM, PDA, or cell phones with web browser (MJPEG mode)

MOBILE SURVEILLANCE

Smartphone App	View live video on iPhone®/Android™ phone
MJPEG Mode	View live image on mobile web browser
3GPP Mode	View live video on 3G cell phone (3GPP Streaming)

GENERAL

Local Storage	microSD/SDHC card slot (supports local storage of snapshots and video recordings)
Illumination LED	1 x white illumination LED (1 W)
PIR Sensor	Effective distance up to 6M (horizontal)
Operating Conditions	0 °C ~ 40 °C
Power Supply	DC 5V/2A
Viewing System Requirements	• Computer with 2.8GHz dual-core processor and 2GB memory or above • Operating system: Windows XP SP3, Vista SP1, Windows 7 • Internet browser: Internet Explorer 8.0 or later; non-IE browsers require 3rd-party VLC plug-in
Package Contents	• CS40 network camera • Software CD (contains user's manual) • Quick installation guide • Ethernet cable • Screws for ceiling mounting • Screw anchor • Power adapter
Dimensions	64 x 74.7 x 110 mm (including bracket)

Camera Layout

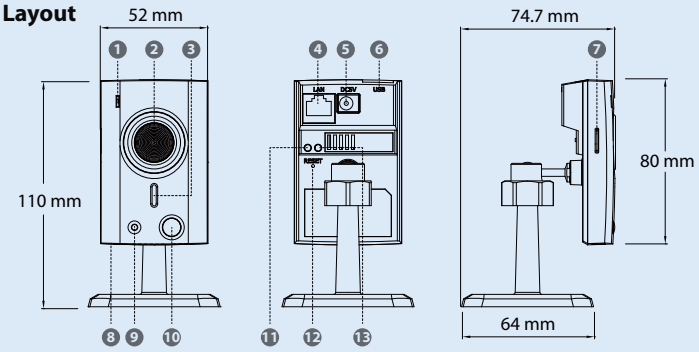

1. LED status indicator
2. Lens
3. Speaker
4. Ethernet port
5. Power connector
6. USB wireless adaptor port
7. MicroSD card slot
8. Microphone pinhole (on the bottom)
9. Illumination LED
10. PIR sensor
11. Connection status indicator
12. Reset button
13. Network speed indicator

Optional Accessory

WL160
802.11 b/g/n USB Wireless Adapter

- Complies with IEEE 802.11b, IEEE 802.11g, and IEEE 802.11n standard
- High data transfer rate – up to 300Mbps
- Supports 64/128-bit WEP, WPA, WPA2

© Copyright 2013. Compro Technology, Inc. All rights reserved. Compro and Compro logo are trademarks of Compro Technology, Inc. Seedonk and Seedonk Messenger are registered trademarks of Seedonk Inc. Other names and marks may be trademarks of their respective owners. Features, pricing, availability, and specifications are subject to change without notice.

COMPRO TECHNOLOGY